



Interchange Element Data Sheet Data sheet created using the Parker Par Fit Toolkit software.


| Creation Date: | 18-05-2016 | |
|-----------------|---------------|--|
| Datasheet No: | DS682W | |
| Parker Part No: | 938284Q | |
| OEM: | Hydac | |
| OEM Part No: | 0330R020BN4HC | |
| | | |

Product Dimensions

| A [mm]: | 94,5 |
|---------|------|
| C [mm]: | 48,2 |
| D [mm]: | 94,5 |
| E [mm]: | 194 |
| G [mm]: | 45,8 |
| H [mm]: | 13,5 |

Construction Materials

| Seal(s): | FPM: Fluoroelastomer | |
|-------------------|------------------------------|--|
| Top Endcap: | Glass reinforced nylon | |
| Bottom Endcap: | Glass reinforced nylon | |
| Support Cylinder: | Mild steel tin plated | |
| Filter Media: | Multilayer fibreglass with c | |

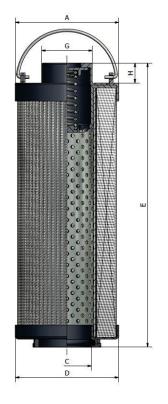



Calculated Performance Criteria

| | ressure (Δp): 3968 @ 32 cSt | 0,35 bar @ 330 l/min | |
|---|---------------------------------------|--|--|
| Efficiency: | | microns & greater 2 microns & greater | |
| Minimum Collapse Pressure: >20 bar Tested to ISO2941 | | | |

Multilayer fibreglass with coated mesh on both sides



ENGINEERING YOUR SUCCESS.

www.parker.com/parfit