


Interchange Element Data Sheet

Data sheet created using the Parker Par Fit Toolkit software.

Creation Date:	18-05-2016
Datasheet No:	DS1015W
Parker Part No:	943819Q
OEM:	MP Filtri
OEM Part No:	CU630A10V&N

Product Dimensions

A [mm]:	130
B [mm]:	76
C [mm]:	76
D [mm]:	130
E [mm]:	250

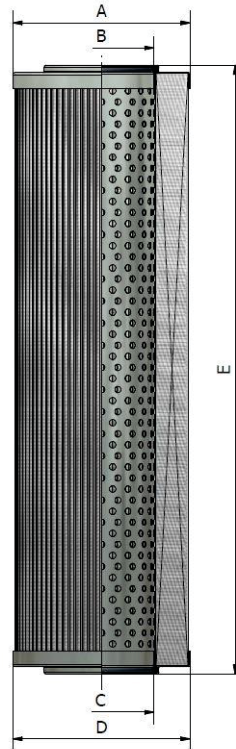

Construction Materials

Seal(s):	FPM: Fluoroelastomer
Top Endcap:	Glass reinforced nylon
Bottom Endcap:	Glass reinforced nylon
Support Cylinder:	Mild steel tin plated
Filter Media:	Multilayer fibreglass with coated mesh on both sides

Calculated Performance Criteria

Differential Pressure (Δp):	0,47 bar @ 750 l/min
Tested to ISO3968 @ 32 cSt	
Efficiency:	>Beta 200 @ 10 microns & greater >Beta 1000 @ 12 microns & greater
Minimum Collapse Pressure:	>10 bar
Tested to ISO2941	