

Interchange Element Data Sheet

Data sheet created using the Parker Par Fit Toolkit software.

Creation Date: 18-05-2016

Datasheet No: DS563W

Parker Part No: PR3145Q

OEM: Hydac

OEM Part No: 0240D010BN3HC


Product Dimensions

A [mm]: 69

B [mm]: 34,2

D [mm]: 69

E [mm]: 172

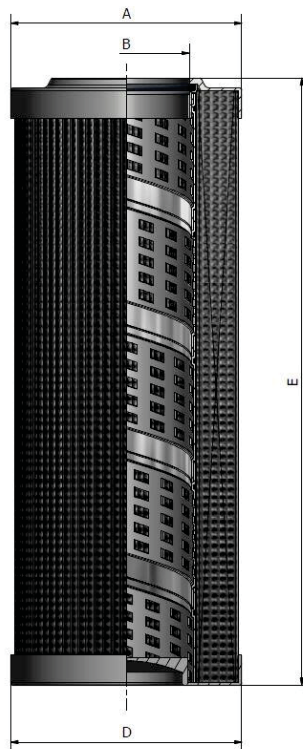

Construction Materials

Seal(s): FPM: Fluoroelastomer

Top Endcap: Mild steel tin plated

Bottom Endcap: Mild steel tin plated

Support Cylinder: Mild steel tin plated

Filter Media: Multilayer fibreglass with coated mesh on both sides

Calculated Performance Criteria

Differential Pressure (Δp): 0,26 bar @ 120 l/min

Tested to ISO3968 @ 32 cSt

Efficiency: >Beta 200 @ 10 microns & greater

>Beta 1000 @ 12 microns & greater

Minimum Collapse Pressure: >20 bar

Tested to ISO2941