
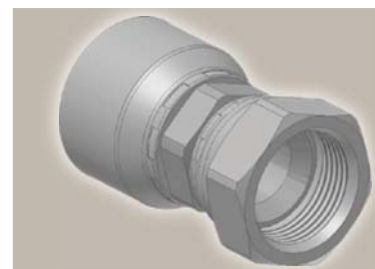


**06/68** Femelle tournant  
**JIC 37° / JIC 37° et SAE 45°**  
ISO12151-5-SWS – DKJ



Référence	D. Int. du tuyau				Filetage UNF	A mm	B mm	H mm	W mm
	DN	pouce	module	mm					
16816-4-4	6	1/4	-4	6,4	7/16x20	51	28	14	17
10616-6-4	6	1/4	-4	6,4	9/16x18	53	31	14	19
16816-5-5	8	5/16	-5	7,9	1/2x20	52	30	14	17
10616-6-6	10	3/8	-6	9,5	9/16x18	52	29	17	19
16816-8-6	10	3/8	-6	9,5	3/4x16	56	34	17	22
16816-8-8	12	1/2	-8	12,7	3/4x16	56	32	22	22
16816-10-8	12	1/2	-8	12,7	7/8x14	62	38	22	27
16816-10-10	16	5/8	-10	15,9	7/8x14	60	35	22	27
10616-12-10	16	5/8	-10	15,9	1 1/16x12	64	39	27	32
10616-12-12	19	3/4	-12	19,1	1 1/16x12	67	41	27	32
10616-16-12	19	3/4	-12	19,1	1 5/16x12	71	45	32	41
10616-16-16	25	1	-16	25,4	1 5/16x12	75	46	32	41

Série d'embouts compatible avec les tuyaux:

16 BCH1 | BCH2