



# Parker Tube Fabricating Equipment

Catalog 4190 - TFE



ENGINEERING YOUR SUCCESS.

**Tube Fabricating Equipment**

- Page 3** Small Bore Expert Training
- Page 4** Tube Benders
- Page 6** Cutting & Deburring Tools
- Page 8** Sealants
- Page 10** Gaugeability Tools

**Introduction:**

At Parker, we feel that the correct tube selection and installation are key ingredients to building leak-free, reliable systems. Within this catalog is a full compliment of tube cutters, deburring, bending, and assembly equipment for use in installing tubing systems in all types of materials.

Dedication to quality at Parker is second to none. Our resources and vast product line, supported by an ISO 9001 Certified Quality Management System, is available through our worldwide distribution network. For more information regarding our tube fabrication equipment and other products and services, please contact your nearest Parker Sales Office, details found on back page.



**WARNING**

FAILURE, IMPROPER SELECTION OR IMPROPER USE OF THE PRODUCTS AND/OR SYSTEMS DESCRIBED HEREIN OR RELATED ITEMS CAN CAUSE DEATH, PERSONAL INJURY AND PROPERTY DAMAGE.

This document and other information from Parker Hannifin Corporation, its subsidiaries or its authorized distributors provide product and/or system options for further investigation by users having technical expertise. It is important that you analyze all aspects of your application and review the information concerning the product or system in the current product catalog. Due to the variety of operating conditions and applications for these products or systems, the user, through its own analysis and testing, is solely responsible for making the final selection of the products and systems and assuring that all performance, safety and warning requirements of the application are met. The products described herein, including without limitation, product features, specifications, designs, availability and pricing, are subject to change by Parker Hannifin Corporation and its subsidiaries at any time without notice.

**Offer of Sale**

The items described in this document are available for sale by Parker Hannifin Corporation, its subsidiaries or its authorized distributors. Any sale contract entered into by Parker will be governed by the provisions stated in Parker's standard terms and conditions of sale (copy available upon request).



Small Bore Expert training is Parker Instrumentation's training programme for small bore tubing systems.

The course has been developed as an upgrade and replacement to our industry leading Safety at Work Programme. It provides material that is relevant to your sales professionals to enable them to conduct their own training sessions with their customer base.

**Some of the advantages over our existing programme are:**

- Greater knowledge of small bore tubing systems
- Increased product familiarity
- Improved selling and presentation ability
- Increased skills and confidence in dealing with small bore systems
- Ability to deliver chargeable training

**The benefits that your nominated trainer can pass on to your customer base are:**

- Increased understanding of their own systems and installation practices
- Improvements in the safety and integrity of their small bore tubing systems
- Overall asset integrity improvement

**What does the Trainer get?**

Five days of training, including two days of presentation training.

**A comprehensive kit including:**

- Spanners
- Tube benders
- Tube cutter
- De-burrer
- Vice grips
- Fittings samples
- Promotional clothing
- License fee

The per delegate cost for the course is £1500 and includes all of the aforementioned items.

All ING distributors will need to have at least one certified trainer in their organisation. This will be the only licensed and certified training course that we will allow to be run with our support.

**What else do you get?**

- Access to the only certified IPDE training course
- A training program we can proudly market to our customers

If you would like further information relating to this training, please contact Parker Instrumentation: +44 (0) 1271 313131

# Tube Benders

## Heavy-Duty Instrument Tube Bender



Roller dies reduce force and tube flattening.



Clearly visible degree marks for accurate bending.

LOCK/UNLOCK WITH A HALF TURN ROTATION

ROLL DIES FOR REDUCED FORCE

BUILT IN VICE CLAMP

ERGONOMIC CUSHIONED GRIPS

EXTRA LONG 16" (40 CM) HANDLES FOR INCREASED LEVERAGE

### Features

- High quality bending performance on stainless steel, and other hard tubing such as steel and titanium.
- Two stage design allows for in-place bending from 90° to 180° without ever crossing handles. Lock/unlock with a half turn rotation of the bending handle.
- Extra long 16" (40 cm) handles increase leverage and roll dies in the bending form reduce force needed.
- Vice clamp built into bending form for extra stability.

### Specifications and How to Order

Tube O.D.	Bend Radius	Weight (Kg)	Part Number
Imperial			
1/4"	5/8"	0.76	PTB-4T
5/16"	15/16"	1.84	PTB-5T
3/8"	15/16"	1.84	PTB-6T
1/2"	1 1/2"	2.76	PTB-8T
Metric			
6 mm	16 mm	0.76	PTB-6M
8 mm	24 mm	1.84	PTB-8M
10 mm	24 mm	1.84	PTB-10M
12 mm	38 mm	2.76	PTB-12M

# Cutting & Deburring Tools

## Screw Feed Tubing Cutter with X-CEL Features



X-CEL KNOB FOR QUICK CUTTING



### Features

- A contoured frame allows for easy alignment while adjusting the cutter to make a cut.
- X-CEL Knob for quick and easy cutting.
- Specially designed stainless steel cutter wheel contains bearings in the hub, to decrease drag around the tube for a smoother cut.
- 6 (in PT-C) or 12 (in PT-CL) individual bearings replace traditional rollers. The bearings create a smoother cut, and allow for increased speed around the tube.

### Specifications and How to Order

Tube O.D.		Weight (Kg)	Part Number
Imperial	Metric		
1/4" - 1 3/8"	6 - 35 mm	0.40	PT-C
1/4" - 2 5/8"	6 - 67 mm	0.68	PT-CL

Replacement wheel - Part number: PT-CS

## Deburrer

A quick twist of the wrist will deburr either the O.D. or the I.D. of the tube end.

Insert the tube into the convexed end of the deburrer for inside deburring and the opposite end for outside deburring. Rotate in either direction.



### Features

- 45 cutting edges on interior cone allow for fast, clean, inner reaming and outer deburring/beveling of copper and stainless steel tubing.
- Hardened steel construction.
- Machined outer surface for ease of grip.

### Specifications and How to Order

Tube O.D.		Weight (Kg)	Part Number
Imperial	Metric		
1/4" - 1 1/4"	6 - 30 mm	0.34	PT-D
1/2" - 2"	12 - 50 mm	0.56	PT-DL

## Parker PT-V Tru-Kut Sawing Vice

### Features


- Hacksaw guide will accommodate tube, pipe and hose from sizes 3 (3/16" O.D.) to 32 (2" O.D.).
- Assures square cut-offs within  $\pm 1^\circ$ . Use a fine tooth hacksaw blade for smoother cuts.

### How To Use

Mount in vice or bolt to bench. Clamp tubing, pipe or hose into the Tru-Kut vice and cut off; guide ensures accurate square cuts.

### How to Order

Vice - Part number: PT-V

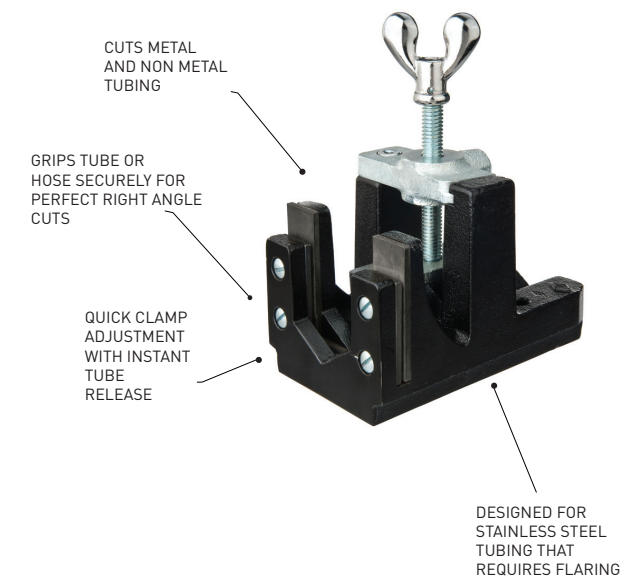

# Sealants

## Parker PSL LOCTITE® 567™

A high performance sealant that locks and seals metal, tapered pipe threads and fittings. Ideal for stainless steel, aluminum, galvanized metal and other inert metals, 567™ has excellent solvent resistance and withstands temperatures to 204°C (400°F).



DESIGNED FOR THE LOCKING AND SEALING OF METAL TAPERED THREADS AND FITTINGS

### Features

- High lubricating properties of this compound prevent galling on stainless steel, aluminum and all other metal pipe threads and fittings
- Recommended for industrial applications in the chemical processing, petroleum refining, pulp/paper, waste treatment, textile, utilities/power generation, marine, automotive, industrial equipment, gas compression and distribution industries.

### How to Order

Size (ml)	Part Number
50	PS-L-50
250	PS-L-250

## PTFE Tape

Polytetrafluoroethylene, or PTFE tape is cut to specified widths for use in sealing pipe threads. The tape is wrapped around the exposed threads of a pipe before it is screwed into place.

The tape is commonly used commercially in pressurised water systems as well as in air compression equipment and thread joints with coarse threads.

One of the defining characteristics of PTFE is how good it is at defeating friction. The use of PTFE tape in tapered pipe threads performs a lubricating function, which more easily allows the threads to be screwed together, to the point of deformation, which is what creates the seal.



### How to Order

PTFE Tape - Part Number: PS - PTFE

## PHinder Liquid Leak Detector

PHinder provides the user the ability to easily find suspected leaks in industrial gas applications. Simply apply the solution to the fitting, valve or system connection and observe if bubbles form to demonstrate a leak's actual location.


### Features

- Excellent bubble action on all surfaces
- Non corrosive, non flammable liquid solution
- Flexible PHinder tube included for hard to reach areas
- Two formulas for applications from -20°F to 200°F in temperature



### How to Order

The correct part number is easily derived from the following number sequence. The three product characteristics required are coded as shown.

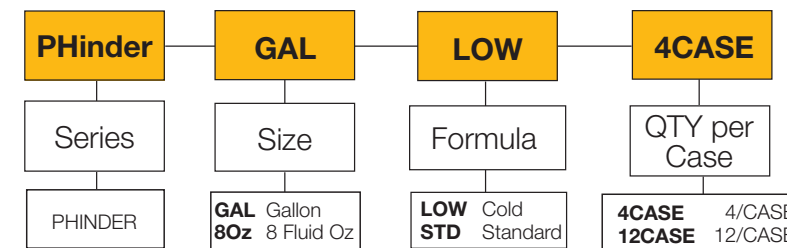

# Gaugeability Tools

## Parker PTM Tube Marker

This tube marker burnishes a mark on the tube quickly and accurately. This visible mark helps the installer ensure the correct depth of tube is inserted into the fitting body.

The tool can also be used to check the burnish mark position. The Tube Marker is available from 1/8" to 1" SAE sizes and from 6 mm to 25 mm Metric sizes.

### Features/Benefits:

- Compact, lightweight design
- Custom sized to tubing used
- Mark is burnished, not scribed on tube surface



### How to Order

The correct part number is easily derived from the following number sequence.

The two product characteristics required are coded as shown below.

<b>PTM</b>	<b>4T</b>																												
Series	Size																												
PTM	<table border="1"> <tr> <td><b>2T</b></td><td>1/8"</td><td><b>6M</b></td><td>6 mm</td> </tr> <tr> <td><b>4T</b></td><td>1/4"</td><td><b>8M</b></td><td>8 mm</td> </tr> <tr> <td><b>6T</b></td><td>3/8"</td><td><b>10M</b></td><td>10 mm</td> </tr> <tr> <td><b>8T</b></td><td>1/2"</td><td><b>12M</b></td><td>12 mm</td> </tr> <tr> <td><b>10T</b></td><td>5/8"</td><td><b>16M</b></td><td>16 mm</td> </tr> <tr> <td><b>12T</b></td><td>3/4"</td><td><b>20M</b></td><td>20 mm</td> </tr> <tr> <td><b>16T</b></td><td>1"</td><td><b>25M</b></td><td>25 mm</td> </tr> </table>	<b>2T</b>	1/8"	<b>6M</b>	6 mm	<b>4T</b>	1/4"	<b>8M</b>	8 mm	<b>6T</b>	3/8"	<b>10M</b>	10 mm	<b>8T</b>	1/2"	<b>12M</b>	12 mm	<b>10T</b>	5/8"	<b>16M</b>	16 mm	<b>12T</b>	3/4"	<b>20M</b>	20 mm	<b>16T</b>	1"	<b>25M</b>	25 mm
<b>2T</b>	1/8"	<b>6M</b>	6 mm																										
<b>4T</b>	1/4"	<b>8M</b>	8 mm																										
<b>6T</b>	3/8"	<b>10M</b>	10 mm																										
<b>8T</b>	1/2"	<b>12M</b>	12 mm																										
<b>10T</b>	5/8"	<b>16M</b>	16 mm																										
<b>12T</b>	3/4"	<b>20M</b>	20 mm																										
<b>16T</b>	1"	<b>25M</b>	25 mm																										

## Parker PPT Preassembly Tool

Parker's Preassembly Tool is an easy-to-use manual tool to ensure the correct preassembly of compression tube fittings on instrumentation tubing. This preassembly will assist in proper initial make-up in tight installation spaces. All preassembly tools have a wrench flat on the bottom so they can be easily mounted in a vice.



### How to Order

The correct part number is easily derived from the following number sequence.

The two product characteristics required are coded as shown below.

<b>PPT</b>	<b>4T</b>																																																
Series	Size																																																
PPT	<table border="1"> <tr> <td><b>2T</b></td><td>1/8"</td><td><b>3M</b></td><td>3mm</td> </tr> <tr> <td><b>3T</b></td><td>3/16"</td><td><b>4M</b></td><td>4mm</td> </tr> <tr> <td><b>4T</b></td><td>1/4"</td><td><b>6M</b></td><td>6 mm</td> </tr> <tr> <td><b>5T</b></td><td>5/16"</td><td><b>8M</b></td><td>8 mm</td> </tr> <tr> <td><b>6T</b></td><td>3/8"</td><td><b>10M</b></td><td>10 mm</td> </tr> <tr> <td><b>8T</b></td><td>1/2"</td><td><b>12M</b></td><td>12 mm</td> </tr> <tr> <td><b>10T</b></td><td>5/8"</td><td><b>14M</b></td><td>14mm</td> </tr> <tr> <td><b>12T</b></td><td>3/4"</td><td><b>16M</b></td><td>16mm</td> </tr> <tr> <td><b>14T</b></td><td>7/8"</td><td><b>18M</b></td><td>18mm</td> </tr> <tr> <td><b>16T</b></td><td>1"</td><td><b>20M</b></td><td>20mm</td> </tr> <tr> <td></td><td></td><td><b>22M</b></td><td>22mm</td> </tr> <tr> <td></td><td></td><td><b>25M</b></td><td>25mm</td> </tr> </table>	<b>2T</b>	1/8"	<b>3M</b>	3mm	<b>3T</b>	3/16"	<b>4M</b>	4mm	<b>4T</b>	1/4"	<b>6M</b>	6 mm	<b>5T</b>	5/16"	<b>8M</b>	8 mm	<b>6T</b>	3/8"	<b>10M</b>	10 mm	<b>8T</b>	1/2"	<b>12M</b>	12 mm	<b>10T</b>	5/8"	<b>14M</b>	14mm	<b>12T</b>	3/4"	<b>16M</b>	16mm	<b>14T</b>	7/8"	<b>18M</b>	18mm	<b>16T</b>	1"	<b>20M</b>	20mm			<b>22M</b>	22mm			<b>25M</b>	25mm
<b>2T</b>	1/8"	<b>3M</b>	3mm																																														
<b>3T</b>	3/16"	<b>4M</b>	4mm																																														
<b>4T</b>	1/4"	<b>6M</b>	6 mm																																														
<b>5T</b>	5/16"	<b>8M</b>	8 mm																																														
<b>6T</b>	3/8"	<b>10M</b>	10 mm																																														
<b>8T</b>	1/2"	<b>12M</b>	12 mm																																														
<b>10T</b>	5/8"	<b>14M</b>	14mm																																														
<b>12T</b>	3/4"	<b>16M</b>	16mm																																														
<b>14T</b>	7/8"	<b>18M</b>	18mm																																														
<b>16T</b>	1"	<b>20M</b>	20mm																																														
		<b>22M</b>	22mm																																														
		<b>25M</b>	25mm																																														

### How to Use

Slide nut and ferrule(s) onto tube. Set the tube into presetting tool ensuring the tube is fully bottomed. Finger tighten the nut, then mark the nut at 6 o'clock position. Tighten the nut 1 turn with a wrench. Remove tube from tool.

Put assembly into the fitting body and tighten the nut to the 9 o'clock position therefore completing the 1-1/4 turns from the original 6 o'clock position.

## Parker PT Inspection Gauges


### PT Combination Gauge

Using this unique Parker combination gauge together with the tube marker will guarantee precise and accurate tubing connections.


Use the No Go gap gauge to ensure that correct turns from finger tight have been achieved.

### How to Use

Insert the gauge lip under the nut - the tube mark should be in line with the polished line on the tubing made by a marker. This proves that the tubing has remained fully bottomed through the installation process.

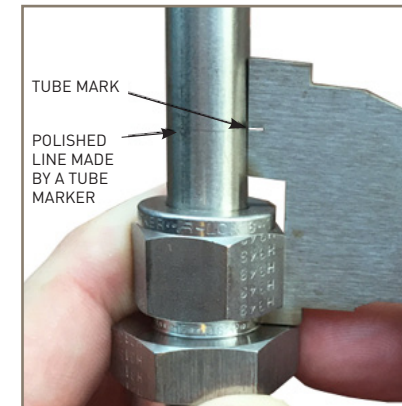

Correct verification of tube bottoming.

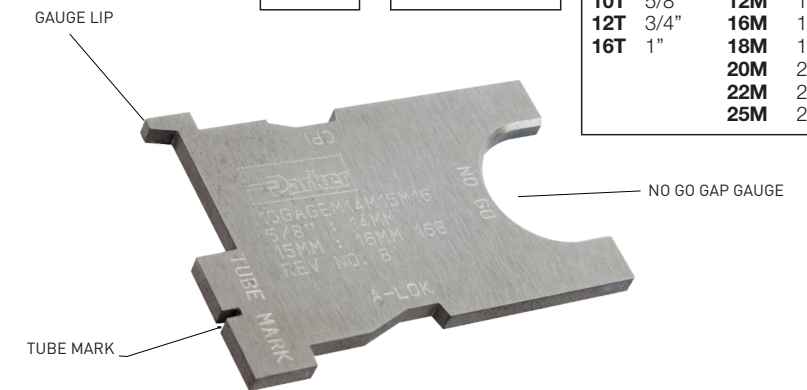

### How to Order

The correct part number is easily derived from the following number sequence. The three product characteristics required are coded as shown below.

<b>PT</b>	<b>CG</b>	<b>4T</b>																																				
Series	Type	Size																																				
PT	Combination Gauge	<table border="1"> <tr> <td><b>4T</b></td><td>1/4"</td><td><b>6M</b></td><td>6 mm</td> </tr> <tr> <td><b>6T</b></td><td>3/8"</td><td><b>8M</b></td><td>8 mm</td> </tr> <tr> <td><b>8T</b></td><td>1/2"</td><td><b>10M</b></td><td>10 mm</td> </tr> <tr> <td><b>10T</b></td><td>5/8"</td><td><b>12M</b></td><td>12 mm</td> </tr> <tr> <td><b>12T</b></td><td>3/4"</td><td><b>16M</b></td><td>16 mm</td> </tr> <tr> <td><b>16T</b></td><td>1"</td><td><b>18M</b></td><td>18 mm</td> </tr> <tr> <td></td><td></td><td><b>20M</b></td><td>20 mm</td> </tr> <tr> <td></td><td></td><td><b>22M</b></td><td>22 mm</td> </tr> <tr> <td></td><td></td><td><b>25M</b></td><td>25 mm</td> </tr> </table>	<b>4T</b>	1/4"	<b>6M</b>	6 mm	<b>6T</b>	3/8"	<b>8M</b>	8 mm	<b>8T</b>	1/2"	<b>10M</b>	10 mm	<b>10T</b>	5/8"	<b>12M</b>	12 mm	<b>12T</b>	3/4"	<b>16M</b>	16 mm	<b>16T</b>	1"	<b>18M</b>	18 mm			<b>20M</b>	20 mm			<b>22M</b>	22 mm			<b>25M</b>	25 mm
<b>4T</b>	1/4"	<b>6M</b>	6 mm																																			
<b>6T</b>	3/8"	<b>8M</b>	8 mm																																			
<b>8T</b>	1/2"	<b>10M</b>	10 mm																																			
<b>10T</b>	5/8"	<b>12M</b>	12 mm																																			
<b>12T</b>	3/4"	<b>16M</b>	16 mm																																			
<b>16T</b>	1"	<b>18M</b>	18 mm																																			
		<b>20M</b>	20 mm																																			
		<b>22M</b>	22 mm																																			
		<b>25M</b>	25 mm																																			

### PT Gap Gauge

This compact C-Ring gap gauge is for imperial and metric sizes. It effectively checks the gap dimensions for correct initial make-up. All sizes can be combined on a key ring for easy handling.



### How to Order

The correct part number is easily derived from the following number sequence. The three product characteristics required are coded as shown below.

<b>PT</b>	<b>GG</b>	<b>4</b>										
Series	Type	Size										
PT	Gap Gauge	<table border="1"> <tr> <td><b>4</b></td><td>1/4" &amp; 6MM</td> </tr> <tr> <td><b>6</b></td><td>3/8" &amp; 10MM</td> </tr> <tr> <td><b>8</b></td><td>1/2" &amp; 12MM</td> </tr> <tr> <td><b>12</b></td><td>3/4" &amp; 18MM</td> </tr> <tr> <td><b>16</b></td><td>1" &amp; 25MM</td> </tr> </table>	<b>4</b>	1/4" & 6MM	<b>6</b>	3/8" & 10MM	<b>8</b>	1/2" & 12MM	<b>12</b>	3/4" & 18MM	<b>16</b>	1" & 25MM
<b>4</b>	1/4" & 6MM											
<b>6</b>	3/8" & 10MM											
<b>8</b>	1/2" & 12MM											
<b>12</b>	3/4" & 18MM											
<b>16</b>	1" & 25MM											

# Parker Worldwide

## Europe, Middle East, Africa

**AE – United Arab Emirates,**  
Dubai

Tel: +971 4 8127100  
parker.me@parker.com

**AT – Austria,** Wiener Neustadt

Tel: +43 (0)2622 23501-0  
parker.austria@parker.com

**AT – Eastern Europe,** Wiener  
Neustadt

Tel: +43 (0)2622 23501 900  
parker.easteurope@parker.com

**AZ – Azerbaijan,** Baku

Tel: +994 50 2233 458  
parker.azerbaijan@parker.com

**BE/LU – Belgium,** Nivelles

Tel: +32 (0)67 280 900  
parker.belgium@parker.com

**BG – Bulgaria,** Sofia

Tel: +359 2 980 1344  
parker.bulgaria@parker.com

**BY – Belarus,** Minsk

Tel: +48 (0)22 573 24 00  
parker.poland@parker.com

**CH – Switzerland,** Etoy

Tel: +41 (0)21 821 87 00  
parker.switzerland@parker.com

**CZ – Czech Republic,** Klecany

Tel: +420 284 083 111  
parker.czechrepublic@parker.com

**DE – Germany,** Kaarst

Tel: +49 (0)2131 4016 0  
parker.germany@parker.com

**DK – Denmark,** Ballerup

Tel: +45 43 56 04 00  
parker.denmark@parker.com

**ES – Spain,** Madrid

Tel: +34 902 330 001  
parker.spain@parker.com

**FI – Finland,** Vantaa

Tel: +358 (0)20 753 2500  
parker.finland@parker.com

**FR – France,** Contamine s/Arve

Tel: +33 (0)4 50 25 80 25  
parker.france@parker.com

**GR – Greece,** Athens

Tel: +30 210 933 6450  
parker.greece@parker.com

**HU – Hungary,** Budaörs

Tel: +36 23 885 470  
parker.hungary@parker.com

**IE – Ireland,** Dublin

Tel: +353 (0)1 466 6370  
parker.ireland@parker.com

**IL – Israel**

Tel: +39 02 45 19 21  
parker.israel@parker.com

**IT – Italy,** Corsico (MI)

Tel: +39 02 45 19 21  
parker.italy@parker.com

**KZ – Kazakhstan,** Almaty

Tel: +7 7273 561 000  
parker.easteurope@parker.com

**NL – The Netherlands,** Oldenzaal

Tel: +31 (0)541 585 000  
parker.nl@parker.com

**NO – Norway,** Asker

Tel: +47 66 75 34 00  
parker.norway@parker.com

**PL – Poland,** Warsaw

Tel: +48 (0)22 573 24 00  
parker.poland@parker.com

**PT – Portugal**

Tel: +351 22 999 7360  
parker.portugal@parker.com

**RO – Romania,** Bucharest

Tel: +40 21 252 1382  
parker.romania@parker.com

**RU – Russia,** Moscow

Tel: +7 495 645-2156  
parker.russia@parker.com

**SE – Sweden,** Spånga

Tel: +46 (0)8 59 79 50 00  
parker.sweden@parker.com

**SK – Slovakia,** Banská Bystrica

Tel: +421 484 162 252  
parker.slovakia@parker.com

**SL – Slovenia,** Novo Mesto

Tel: +386 7 337 6650  
parker.slovenia@parker.com

**TR – Turkey,** Istanbul

Tel: +90 216 4997081  
parker.turkey@parker.com

**UA – Ukraine,** Kiev

Tel: +48 (0)22 573 24 00  
parker.poland@parker.com

**UK – United Kingdom,** Warwick

Tel: +44 (0)1926 317 878  
parker.uk@parker.com

**ZA – South Africa,** Kempton Park

Tel: +27 (0)11 961 0700  
parker.southafrica@parker.com

## North America

**CA – Canada,** Milton, Ontario

Tel: +1 905 693 3000

**US – USA,** Cleveland

Tel: +1 216 896 3000

## Asia Pacific

**AU – Australia,** Castle Hill

Tel: +61 (0)2-9634 7777

**CN – China,** Shanghai

Tel: +86 21 2899 5000

**HK – Hong Kong**

Tel: +852 2428 8008

**IN – India,** Mumbai

Tel: +91 22 6513 7081-85

**JP – Japan,** Tokyo

Tel: +81 (0)3 6408 3901

**KR – South Korea,** Seoul

Tel: +82 2 559 0400

**MY – Malaysia,** Shah Alam

Tel: +60 3 7849 0800

**NZ – New Zealand,** Mt Wellington

Tel: +64 9 574 1744

**SG – Singapore**

Tel: +65 6887 6300

**TH – Thailand,** Bangkok

Tel: +662 186 7000

**TW – Taiwan,** Taipei

Tel: +886 2 2298 8987

## South America

**AR – Argentina,** Buenos Aires

Tel: +54 3327 44 4129

**BR – Brazil,** Sao Jose dos Campos

Tel: +55 800 727 5374

**CL – Chile,** Santiago

Tel: +56 2 623 1216

**MX – Mexico,** Toluca

Tel: +52 72 2275 4200



Parker Hannifin Manufacturing Ltd  
Instrumentation Products Division Europe  
Riverside Road  
Pottington Business Park  
Barnstaple, Devon, EX31 1NP  
United Kingdom  
Tel.: +44 (0) 1271 313131  
www.parker.com/ipd

## EMEA Product Information Centre

**Free phone: 00 800 27 27 5374**

(from AT, BE, CH, CZ, DE, DK, EE, ES, FI, FR, IE, IL,  
IS, IT, LU, MT, NL, NO, PL, PT, RU, SE, SK, UK, ZA)

## US Product Information Centre

**Toll-free number: 1-800-27 27 537**

www.parker.com