


PVL-B & PVL-C Inline Valves Modular Pilot System for PVL-B / PVL-C low power solenoid body

Modular piloting system


PVL-B & PVL-C valve module for air-pilot connector or lower power (1,2 W / 1,6 VA) solenoid valve

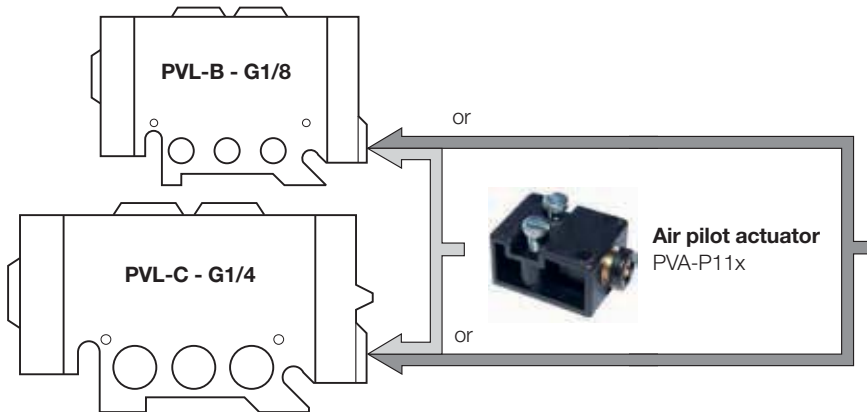


Low power 15 mm solenoid valve actuator + 15 mm connector IP65
P2E-KVx + P8x-x
Option : Protection P8V-CRx





Air-pilot actuator for PVL-B and PVL-C valve

Description	Pneumatic connection	Weight (g)	Order code
 Air-pilot actuator for PVL-B & PVL-C 15mm solenoid body	Push-in Ø 4 mm	7	PVA-P111
	Threaded M5	2	PVA-P115

Solenoids 15mm 1,2 W / 1,6 VA (230 VAC 2,4 VA) (8mm pin spacing)

Description	Voltage	Weight (g)	Manual override		
			Without Order code	Spring return Order code	Indexing Order code
 Solenoid valve 15 mm	12 VDC	38	P2E-KV32B0	P2E-KV32B1	P2E-KV32B2
	24 VDC	38	P2E-KV32C0	P2E-KV32C1	P2E-KV32C2
	48 VDC	38	P2E-KV32D0	P2E-KV32D1	P2E-KV32D2
	24 V 50/60Hz	38	P2E-KV31C0	P2E-KV31C1	P2E-KV31C2
	48 V 50/60Hz	38	P2E-KV34D0	P2E-KV34D1	P2E-KV34D2
	115 V 50Hz, 120 V 60Hz	38	P2E-KV31F0	P2E-KV31F1	P2E-KV31F2
	230 V 50Hz, 240 V 60Hz	38	P2E-KV31J0	P2E-KV31J1	P2E-KV31J2
Pack of 20 seals	All solenoids	5	-	-	PPR-V20

Cable plugs 15 mm - IP65 (8mm pin spacing)

Description	Electrical protection	Cable length	Weight (g)	Order code
 Large headed screw	No protection	No cable	16	P8C-C
	LED + Protection 24 VDC <small>For inaccessible or recess position</small>	No cable	16	P8C-C26C
 Standard screw	No protection	No cable	11	P8C-D
		2 m cable	97	P8L-C2
		5 m cable	228	P8L-C5
	LED + Protection 24 VDC	No cable	11	P8C-D26C
	LED + Protection 24 VDC/AC	2 m cable	97	P8L-C226C
	5 m cable	229	P8L-C526C	